

Using a Leica DISTO™ Device with Chief Architect Software

Reference Number: **KB-01846**

Last Modified: **July 15, 2021**

The information in this article applies to:



QUESTION

Is there a way to use my Leica DISTO™ laser measuring device with my Chief Architect software so I can take measurements of an existing job site?

ANSWER

Leica Geosystems (<https://leica-geosystems.com/en-us>) manufactures several types of laser measurement devices among which are the DISTO™ distance measuring devices.


Depending on the model, many of these support Bluetooth which allow you to interface with a computer that also has Bluetooth. Currently, both the Leica DISTO™ X3 (<https://shop.leica-geosystems.com/buy/package/x3>) and the Leica DISTO™ X4 (<https://shop.leica-geosystems.com/buy/package/x4>) can be used with Chief Architect software seamlessly on both the Windows and macOS platforms.

To use a supported DISTO™ device with Chief Architect software

1. Pair the supported DISTO™ measuring device to your computer via Bluetooth.

Note: If you have trouble pairing your DISTO™ measuring device to your computer, please refer to the Leica Help documentation for your device model.

2. Select a wall or other object in your Chief Architect/Home Designer program and click on the wall's controlling dimension line.

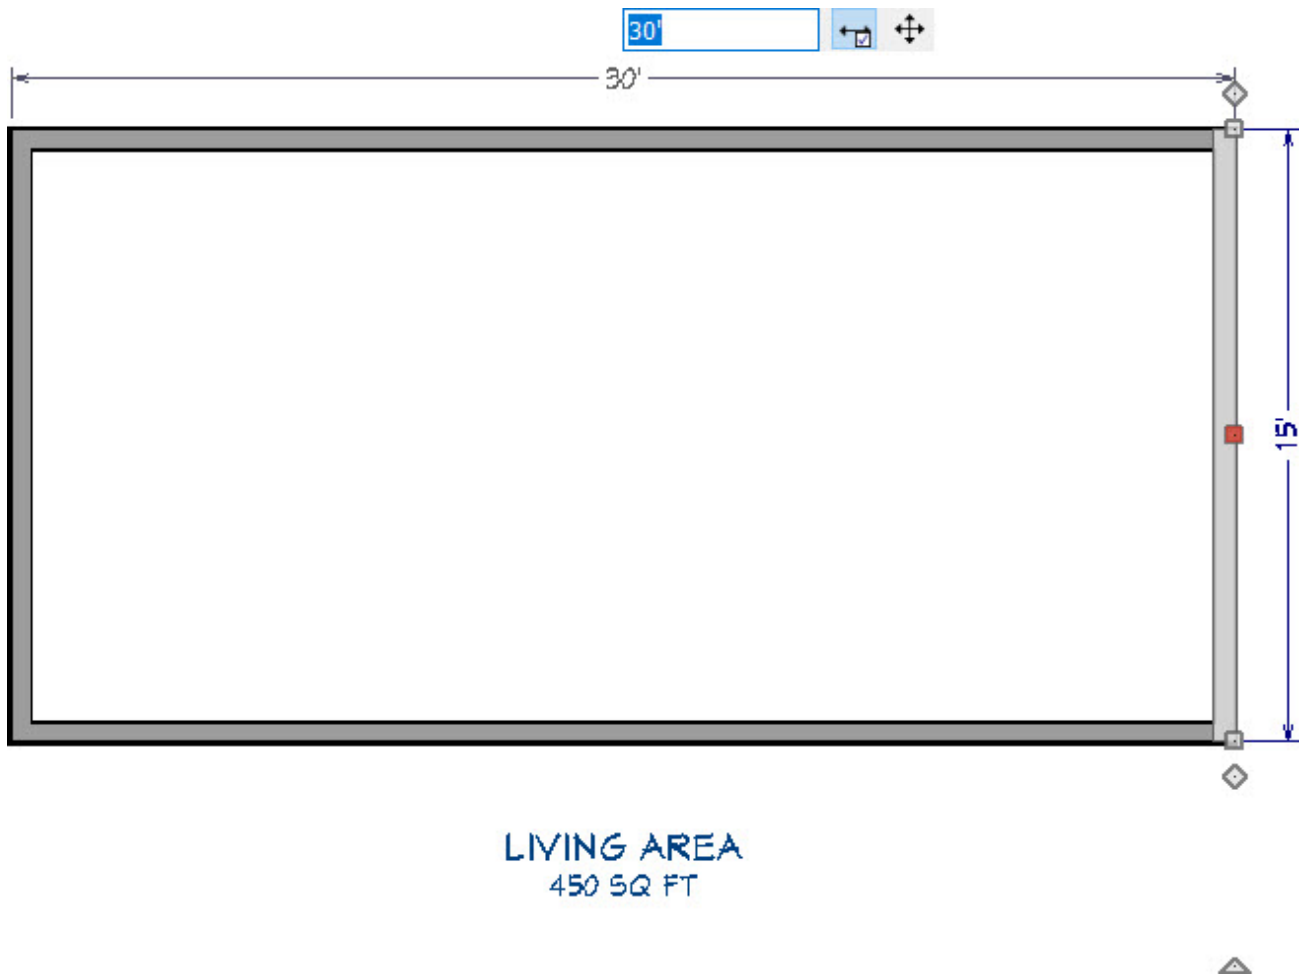

3. With the input field active, use your DISTO™ measuring device and take a measurement.
4. The DISTO™ measuring device will transmit the data to the open dimension field and will automatically press **Enter/Return** to move the object to the new distance.

If the dimension field does not close, press **Enter/Return** on your keyboard.

Note: If you notice that the unit of measurement (", ') is not following the measurement value, enter this in using your keyboard and then select the Enter/Return key.


5. Repeat the process until you are done measuring the rest of the structure.

MORE INFORMATION

If you'd like to use a different Leica DISTO™ device model that supports Bluetooth, install and configure DISTO™ Transfer (<https://shop.leica-geosystems.com/disto-transfer-software-pc>) for PC, a program designed to accept input from your DISTO™ device for use on your Windows based computer. DISTO™ Transfer is not compatible for the macOS platform at this time.

For additional information on how to use DISTO™ Transfer or your DISTO™ device, please consult the Leica Help documentation.

Related Articles

 [Moving Walls Using Dimensions \(/support/article/KB-01116/moving-walls-using-dimensions.html\)](/support/article/KB-01116/moving-walls-using-dimensions.html)



[\(https://chieftalk.chiefarchitect.com/\)](https://chieftalk.chiefarchitect.com/)

 [\(/blog/\)](/blog/)



[\(https://www.facebook.com/ChiefArchitect\)](https://www.facebook.com/ChiefArchitect)



[\(https://www.youtube.com/user/ChiefArchitectInc\)](https://www.youtube.com/user/ChiefArchitectInc)



[\(https://www.instagram.com/chiefarchitectsoftware/\)](https://www.instagram.com/chiefarchitectsoftware/)



[\(https://www.houzz.com/pro/chiefarchitect/\)](https://www.houzz.com/pro/chiefarchitect/)



[\(https://www.pinterest.com/chiefarchitect/\)](https://www.pinterest.com/chiefarchitect/)

[208-292-3400 \(tel:+1-208-292-3400\)](tel:+1-208-292-3400)

© 2000–2021 Chief Architect, Inc.

[Terms of Use \(/company/terms.html\)](/company/terms.html)

[Privacy Policy \(/company/privacy.html\)](/company/privacy.html)